

Hybrid Inverter

VH-3.0 / 3.6 / 4.0 / 4.6 / 5.0 / 5.5 / 6.0KW

VH-7.0 / 7.6 / 8.0KW

VH Series

Single-phase Low Voltage



Hybrid Inverter



VH-3.0 / 3.6 / 4.0 / 4.6 / 5.0 / 5.5 / 6.0KW

Smart Energy Smarter Future



VH Series

Single-phase Low Voltage

EVERY RAY
COUNT



FEATURES



Up-to-120A current of battery charge and discharge



Off-grid peak power of twice of rated power within 15 seconds




Switching as uninterruptible power supply within 10ms



Supporting lead-acid batteries and lithium batteries and matching economical solutions for different markets

Smart Energy Solutions

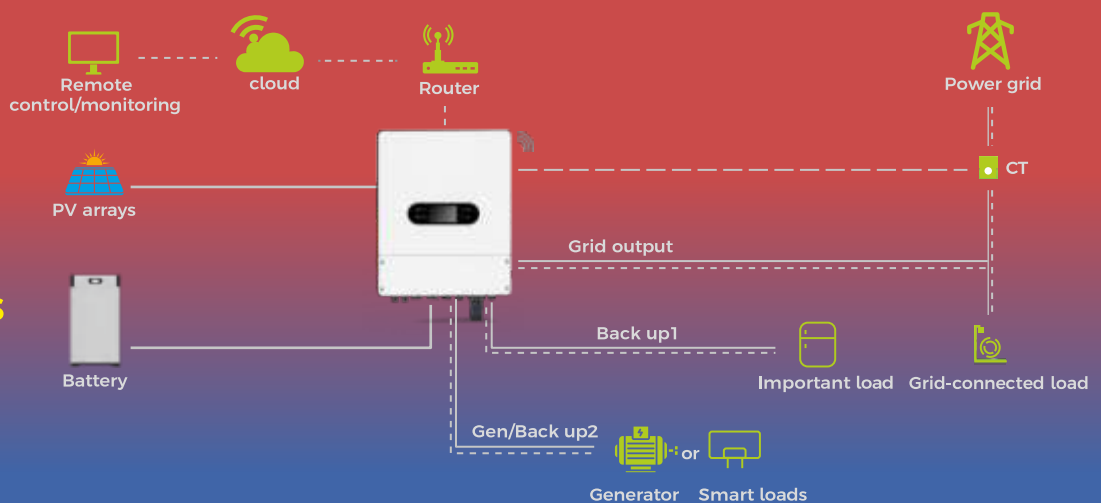

Contact us

VELOX ENERGY PRIVATE LIMITED

+91 90817 25258

info@veloxenergy.in
sales@veloxenergy.in

www.veloxenergy.in

TECHNICAL DATA



Model Name	VH- 3.0KW	VH- 3.6 KW	VH- 4.0 KW	VH- 4.6 KW	VH- 5.0 KW	VH- 6.0 KW
Battery input data						
Battery Type	Lithium or lead acid battery					
Rated battery voltage	48V					
Maximum charging voltage	≤60 (Configurable)					
Maximum charge/discharge current	75A	90A	100A	110A	120A	120A
PV input data						
Maximum DC input power	6kW	7.2kW	8kW	9.2kW	10kW	12kW
Maximum DC input voltage	500V					
MPPT Operating voltage range	150~450V					
Starting voltage	125V					
Maximum input current	18A	18/18A	18/18A	18/18A	18/18A	18/18A
MPPT number	1	2	2	2	2	2
AC output parameters (On-Grid)						
Maximum output apparent power	3300W	3960W	4400W	5000W	5500W	6000W
Rated output voltage	220/230V					
Rated output frequency	50/60Hz					
Max output current	15A	18A	20A	22A	25A	27A
Output power factor	1 (-0.8 leading~+0.8 lagging)					
AC output parameters(Off-Grid)						
Rated output apparent power	3000W	3600W	4000W	4600W	5000W	6000W
Maximum output apparent power	>200%,15sec					
Rated output voltage	230V					
Rated output frequency	50/60Hz					
Max output current	14A	16A	18A	21A	23A	27A
Efficiency						
Max efficiency	97.6%					
Max efficiency	94.5%					
Europe efficiency	97%					
Protection						
PV input reverse polarity protection	Yes					
PV insulation resistance detection	Yes					
Residual current detection	Yes					
Output over current protection	Yes					
Output short circuit protection	Yes					
Output over voltage protection	Yes					
Basic data						
Operation temperature	25°C~60°C (frequency-decreasing above 45°C)					
Storage temperature	-30~65°C					
Relative humidity	0~95%					
Working altitude	≤4000m (frequency-decreasing above 2000m)					
Cooling	Natural cooling					
Noise	<55db					
Weight	20kg					
Dimensions (W*H*D)	198*427*554mm					
Protection class	IP66					
Topology	HF isolation (Battery side)					
Standard						
Safety standard/EMC standard	NB/T32004-2018, IEC62109, IEC61000, Is16169 & IS16221(BIS)					
Grid-connected standard	IEC61727, En50549 -1, VDE-4105, NRS-09a7-2-1, OVE-Richtlinie R25, UNE217001/2, Ordinance No.140					

Hybrid Inverter



VH-7.0 / 7.6 / 8.0KW

Smart Energy Smarter Future



VH Series

Single-phase Low Voltage

EVERY RAY
COUNT



FEATURES



Up-to-120A current of battery charge and discharge



Off-grid peak power of twice of rated power within 15 seconds




Switching as uninterruptible power supply within 10ms



Supporting lead-acid batteries and lithium batteries and matching economical solutions for different markets

Smart Energy Solutions

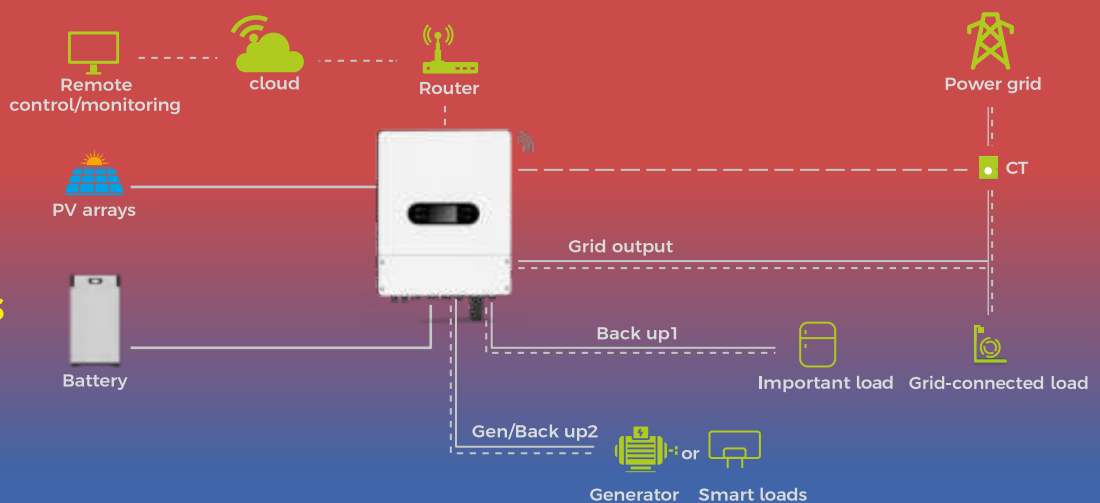

Contact us

VELOX ENERGY PRIVATE LIMITED

+91 90817 25258

info@veloxenergy.in
sales@veloxenergy.in

www.veloxenergy.in

TECHNICAL DATA



Model Name	VH- 7.0KW		VH- 7.6 KW	VH- 8.0 KW
Battery input data				
Battery Type	Lithium or lead acid battery			
Rated battery voltage	48V			
Maximum charging voltage	≤60 (Configurable)			
Maximum charge/discharge current	175A	190A	190A	
PV input data				
Maximum DC input power	14000W	15200W	16000W	
Maximum DC input voltage	500V			
MPPT Operating voltage range	150~450V			
Starting voltage	125V			
Maximum input current	30/18A	30/18A	30/18A	
MPPT number	1	2	2	
AC output parameters (On-Grid)				
Maximum output apparent power	7700W	8360W	8800W	
Rated output voltage	220/230V			
Rated output frequency	50/60Hz			
Max output current	35A	38A	40A	
Output power factor	~1 (-0.8 leading~+0.8 lagging)			
AC output parameters(Off-Grid)				
Rated output apparent power	7000W	7600W	8000W	
Maximum output apparent power	>200%,15sec			
Rated output voltage	220/230V			
Rated output frequency	50/60Hz			
Max output current	35A	38A	40A	
Efficiency				
Max efficiency	98%			
Max efficiency	94.5%			
Europe efficiency	97.5%			
Protection				
PV input reverse polarity protection	Yes			
PV insulation resistance detection	Yes			
Residual current detection	Yes			
Output over current protection	Yes			
Output short circuit protection	Yes			
Output over voltage protection	Yes			
Basic data				
Operation temperature	-25°C~60°C (frequency-decreasing above 45°C)			
Storage temperature	-30~65°C			
Relative humidity	0~95%			
Working altitude	≤4000m (frequency-decreasing above 2000m)			
Cooling	Intelligent forced air cooling			
Noise	<55db			
Weight	21.5kg			
Dimensions (W*H*D)	198*427*554mm			
Protection class	IP66			
Topology	HF isolation (Battery side)			
Standard				
Safety standard/EMC standard	NB/T32004-2018, IEC62109, IEC61000, Is16169 & IS16221(BIS)			
Grid-connected standard	IEC61727, En50549 -1, VDE-4105, NRS-09a7-2-1, OVE-Richtlinie R25, UNE217001/2, Ordinance No.140			



Contact us

VELOX ENERGY PRIVATE LIMITED
+91 90817 25258

info@veloxenergy.in
sales@veloxenergy.in

www.veloxenergy.in